

WERKBUND

CONCRETE

TECH
PORCELAIN

Land
PORCELANICO



Werkbund	04
Werkbund IVORY 10 mm	06
Werkbund GREY 10 mm	08
Werkbund ANTHRACITE 10 mm	10
Werkbund STAMP 10 mm	12
TECHNICAL CHARACTERISTICS_ CARACTERÍSTICAS TÉCNICAS	15

WERKBUND

✂ thickness 10 mm approx.

La colección Werkbund es un cemento armado inspirado en la decadencia de la caída del muro.

Esta colección pertenece a la actual tendencia Green Code, donde se proponen superficies en estado primitivo.

Sus productos hápticos han sido pensados para ser convertidos en materiales "ad-hoc".

El diseño de esta colección, está pensado para recubrir amplias superficies dándole un aspecto de autenticidad y marcando la esencia de la estancia.

Contamos con 3 colores base, Ivory, Grey y Anthracite a los que se añade un decorado abstracto como base estética.

La materia prima con la que se realiza es porcelánico de altas prestaciones, en formatos 100x100 / 50x100 cm rectificado.

Un acabado natural que le aporta la personalidad de un cemento armado original.

Werkbund collection recreates a reinforced concrete aged with the decay of vertical surfaces.

This collection is inspired by the Green Code trend, where primitive surfaces are proposed and its haptic products have been thought to be converted into "ad-hoc" materials. The design of this collection seeks to cover large surfaces with an authentic look that will enhance the essence of the atmosphere.

Featuring three base colors, ivory, grey and anthracite to which an abstract feature tile is added; these high-performance porcelain tiles are available in 100x100 and 50x100 cm rectified formats and an R10 natural finish for commercial as well as residential projects.

COLORS ►
COLORES ►



IVORY



GREY



ANTHRACITE



STAMP



WERKBUND IVORY

FLOOR:

Werkbund Ivory Natural
49,75x99,55 cm

WALL:

Werkbund Nat. Hexagon 30
Ivory/Anthracite
24,22x27,96 cm



WERKBUND GREY

FLOOR:

Werkbund Grey Natural
99,55x99,55 cm

WALL:

Werkbund Ivory Natural
49,75x99,55 cm

Werkbund Anthracite Natural
99,55x99,55 cm



WERKBUND ANTHRACITE

FLOOR:

Werkbund Anthracite Natural
99,55x99,55 cm




WERKBUND STAMP

FLOOR:


Werkbund Stamp Natural
99,55x99,55 cm

Werkbund Grey Nat. Mos.
Hexagonal
28x30 cm

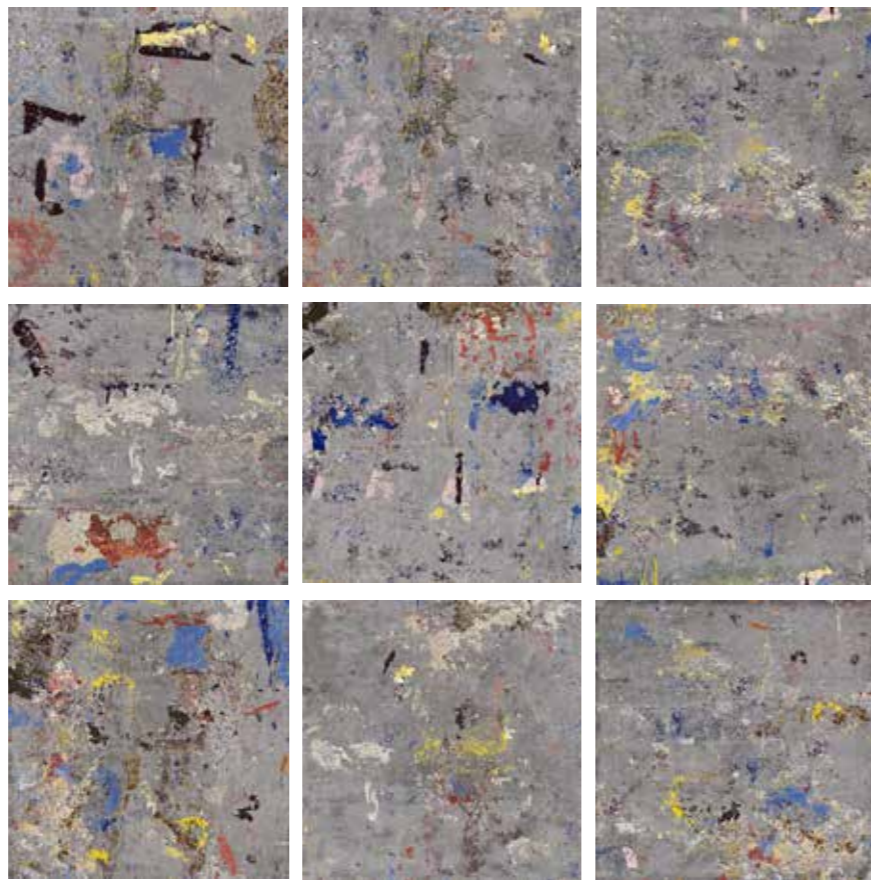


✂ thickness 10 mm approx.

FORMATS_FORMATOS



Werkbund Natural
Werkbund Stamp Natural
99,55x99,55 cm

G-6284
G-6372



Werkbund Nat.
Werkbund Stamp Nat.
49,75x99,55 cm

G-6170
G-6234

STEPS_PELDAÑOS

SIMPLE

Natural		
Peldaño Simple-50	(50x100 cm)	5337
Peldaño Simple-100	(100x100 cm)	5559
Peldaño Simple Áng.	(50x100 cm)	5375
Peldaño Simple Áng.	(100x100 cm)	5623

GRADONE

Natural		
Peldaño Grad-50	(50x100 cm)	5655
Peldaño Grad-100	(100x100 cm)	5723
Peldaño Grad. Áng.	(50x100 cm)	5723
Peldaño Grad. Áng.	(100x100 cm)	5779

NATURAL FINISH
CLASE 2 R10
UNE-ENV 12633 DIN 51130

DCOF>0.42
ANSI A 137.1-2012

PTV>36
BS 7976

SPECIAL PIECES_PIEZAS ESPECIALES



Werkbund Nat.
Mos. 5x5
Ivory / Grey / Anthracite
G-6558
Stamp
29,75x29,75 cm

G-6584



Werkbund Nat.
Mos. Hexagonal
Ivory / Grey / Anthracite
G-5149
Stamp
28x30 cm

G-5163



Werkbund Nat.
Hexagon 30
Ivory/Anthracite
24,22x27,96 cm

G-5125



Werkbund Nat.
Rodapié 50
7,3x49,75 cm
G-5057



Werkbund Nat. Rodapié 100
7,3x99,55 cm
G-5117

TECHNICAL CHARACTERISTICS_CARACTERÍSTICAS TÉCNICAS

MEASUREMENTS AND SURFACES APPEARANCE MEDIDAS Y ASPECTO SUPERFICIAL	STANDARD TEST METHOD METODO DE ENSAYO	STANDARD PRESCRIBED VALUES VALORES STANDARD NORMA	Werkbund collection 10 mm*
Length and width. Lunghezza e larghezza. Longitud y anchura. Länge und Breite	ISO 10545-2	± 0,6% max.	± 0,2%
Orthogonality. Ortogonalità. Ortogonalidad. Rechtwinkligkeit	ISO 10545-2	± 0,5% max.	± 0,2%
Straightness of sides. Rettilineità dei lati. Rectitud de lados. Kantengeradigkeit	ISO 10545-2	± 0,5% max.	± 0,2%
Surfaces flatness. Planarità. Planitud. Ebenflächigkeit	ISO 10545-2	± 0,5% max.	± 0,5%
PHYSICAL PROPERTIES PROPIEDADES FÍSICA			
Water absorption. Absorción de agua.	ISO 10545-3	≤ 0,5%	< 0,2%
Breaking strength, in N. Carga de rotura, en N.	ISO 10545-4	≥ 1300 N	> 2400 N
Modulus of rupture. Resistencia a la flexión.	ISO 10545-4	≥ 35 N/mm ²	> 40 N/mm ²
Resistance to thermal shock. Resistencia al choque térmico.	ISO 10545-9	No surface defects should be visible No debe presentar defectos superficiales visibles	Resistant Resistente
Frost resistance. Resistencia a la helada.	ISO 10545-12	No surface defects or cracks should be visible No debe presentar defectos ni grietas superficiales visibles	Frost Resistant Resistente a la Helada
Coefficient of friction. Coeficiente de fricción.	DIN 51130 UNE-ENV 12633 DCOF - ANSI A 137.1 BS 7976	-	R10 Clase 2 DCOF >0,42 PTV >36
Colour resistance to light. Resistencia del color a la luz.	DIN 51094	There should be no colour variations No debe presentar variaciones de color	No alterations in colour and shine No presenta variaciones de color y brillo
CHEMICAL PROPERTIES PROPIEDADES QUÍMICAS			
Chemical resistance. Resistencia química.	ISO 10545-13	Resistance to household cleaning products and swimmingpools salts. Resistencia a productos domésticos y sales para piscinas.	Min. UB
Resistance to staining. Resistencia a las manchas.	ISO 10545-14	Declared Value Valor Declarado	5

* The Land values are the average of different production consignments. For further detail information, please check with our commercial network.
Los valores declarados son el promedio obtenido a través de ensayos de diferentes producciones. Para la obtención de una información detallada consultar a la red comercial.
For projects check technical information with our commercial networks. / Para proyectos obtenga información técnica a través de nuestra red comercial.

www.landporcelanico.com

Ctra. Castellón-San Juan de Moró km. 12,5 12130 San Juan de Moró. Castellón. Spain.
T: +34 964 70 10 15 | E: land@landporcelanico.com

WERKBUND

DECOR

TECH
PORCELAIN

Land
PORCELANICO